




Original and Genuine
**BUCK'S
BALLAST**

The THREE EASY STEPS TO A FAST, PERFECT, BALLAST JOB using the Original and Genuine Buck's Ballast.


1.

Apply Buck's Ballast between ties and down the slopes. Make sure no ballast is on top of ties, or caught in the web of the rails, outside or inside. A soft brush or foam applicator may be helpful, but use whatever tool works best for you. Shape the ballast to appearance you prefer.

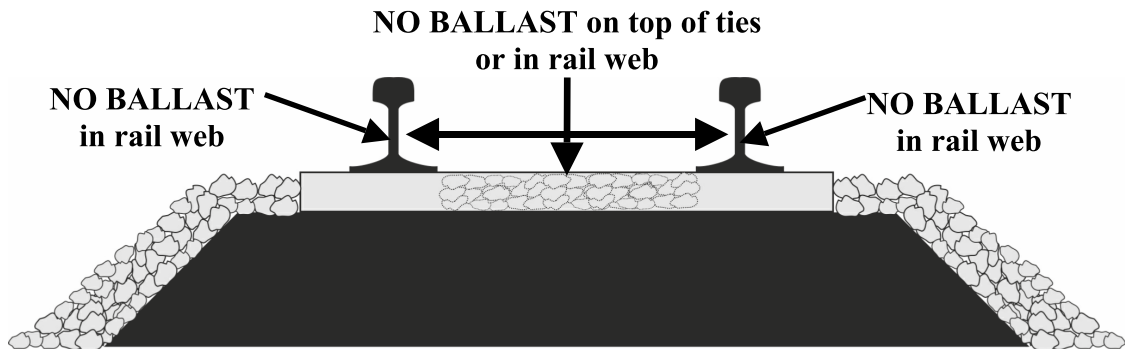

2.

Spray ballast with a 50/50 or stronger mix of water and alcohol. Apply liberally between ties and along sides to thoroughly soak into the ballast.

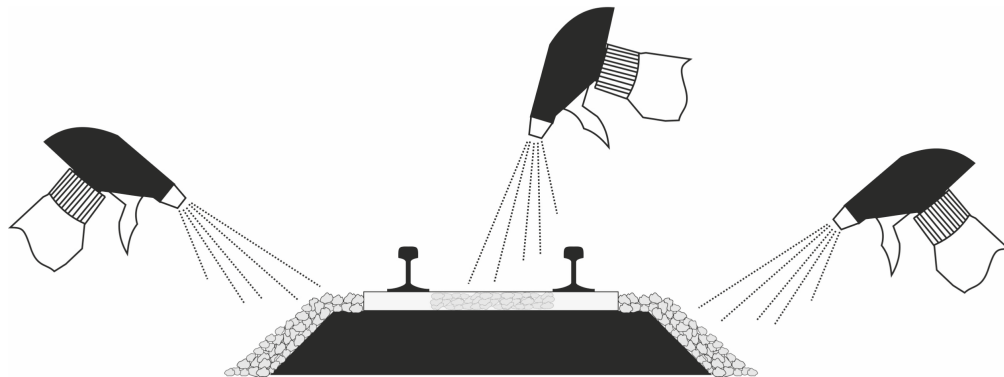

3.

From a nozzled squeeze bottle or similar, apply a 50/50 mix of white glue and alcohol, covering all ballast. Don't worry about some puddling of glue, it will sink into the ballast. Optionally spray again with water and alcohol mix from 2., above to assist soaking into the ballast. Let dry over night. Touch up any thin or missed sport with pinches of ballast and a few drops of glue mix. That's it! You're done.

